

Fire Alarm Cable 2Cores Shielded 18AWG CCA

Basic Construction

		2 Cores
Conductor	Material	CCA
	Nom.Dia(mm)	1.02
	AWG	18AWG
Dielectric	Material	Fire Resistance PVC
	Nom.Dia(mm)	2.0
Drain wire	Material	CCA
Jacket	Material	Fire Resistance PVC
	Nom.Dia(mm)	5.6




BASIC CHARACTERISTICS

Min insulation resistance 20°C	200 MΩ / km
Temperature Rating	-20°C to 75°C
Operating Voltage	300V
Minimum Bend Radius	8×Diameter
Flammability / Reaction to Fire	IEC/EN 60332-1-2:2005+A1:2016+A11:2016+A12:2021
CPR Compliance	CPR Euroclass: Eca
European Directive Compliance	EU CE Mark, EU Directive 2011/65/EU (RoHS 2), EU Directive 2015/863/EU (RoHS 2 amendment)



Packing

100m plastic reel

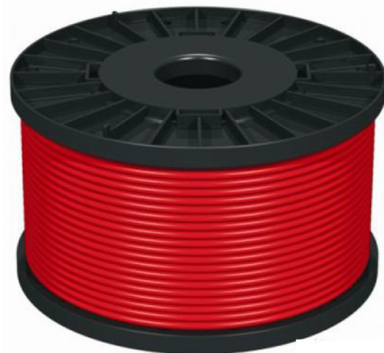

305m wooden drum



MADE IN CHINA

Fire Alarm Cable 2Cores Shielded 16AWG CCA



Basic Construction

		2 Cores
Conductor	Material	CCA
	Nom.Dia(mm)	1.29
	AWG	16AWG
Dielectric	Material	Fire Resistance PVC
	Nom.Dia(mm)	2.3
Drain wire	Material	CCA
Jacket	Material	Fire Resistance PVC
	Nom.Dia(mm)	6.2




BASIC CHARACTERISTICS

Min insulation resistance 20°C	200 MΩ / km
Temperature Rating	-20°C to 75°C
Operating Voltage	300V
Minimum Bend Radius	8×Diameter
Flammability / Reaction to Fire	IEC/EN 60332-1-2:2005+A1:2016+A11:2016+A12:2021
CPR Compliance	CPR Euroclass: Eca
European Directive Compliance	EU CE Mark, EU Directive 2011/65/EU (RoHS 2), EU Directive 2015/863/EU (RoHS 2 amendment)



Packing

100m plastic reel

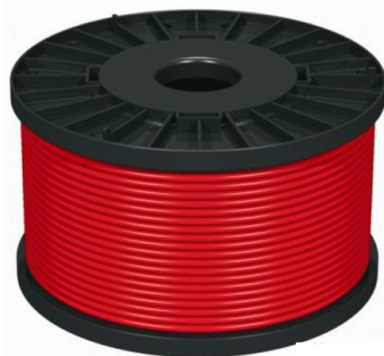

305m wooden drum



MADE IN CHINA